

# EXPERIENCES WITH AN EMERGENCY SPRAY COOLING POND

By A. H. WINTERBACH

*Transvaalse Suikerkorporasie Beperk, Malelane*

## Abstract

The design and performance of an emergency spray cooling pond, which was constructed at ML during 1983, are discussed.

## Introduction

Spray cooling ponds are not favoured as far as the cooling of condenser water in a sugar factory is concerned. Modern design cooling towers are reputed to be much more efficient but are more expensive. There are times however, when spray cooling ponds have to be built and it is hoped that the experience gained in building such an old-fashioned contraption will serve a useful purpose if a similar situation should arise at other mills.

## Problem

Cooling water for condensers at ML is derived from two sources (see Figure 1):

- directly out of the Crocodile river at 2 731 m<sup>3</sup>/h and
- from a three-cell cooling tower at 1 320 m<sup>3</sup>/h.

The total quantity of cooling water used is 4 051 m<sup>3</sup>/h which, under the circumstances, will cater for a crushing rate of 330 tons cane per hour (tch).

At Malelane, the cooling water requirement is thus 12,27 m<sup>3</sup>/tch under the particular climatic conditions of cooling water temperature at 32°C, out of condenser at 49°C, dry bulb temperatures of 36°C, and wet bulb 25°C. At the coast, conditions would obviously be different.

At Noodsberg, the figure appears to be 14,78 m<sup>3</sup>/tch and 12,49 m<sup>3</sup>/tch at Amatikulu which processes raw sugar only.

At the beginning of 1983, the severe drought caused a serious drop in the level of the Crocodile river and by March 1983 there had still not been any rain. Something had to be done very soon or crushing would not be possible. Two thirds of the cooling water supply was no longer available.

## Solution

The only practical solution was to build a spray cooling pond which would be available in time. This decision was taken towards the end of March 1983 and the mill was due to start up on 16 May 1983, a little more than seven weeks later.

## Technical Details

The system that was designed catered for a water flow of 2 079 m<sup>3</sup>/h which, with the existing cooling tower of 1 320 m<sup>3</sup>/h, gave a total of 3 399 m<sup>3</sup>/h which would ensure a cane crushing capacity of 280 tch. ML's normal crushing rate is 325 tch but as a result of the droughts, this was reduced to 280 tch. The system (see Figure 1) consisted of:

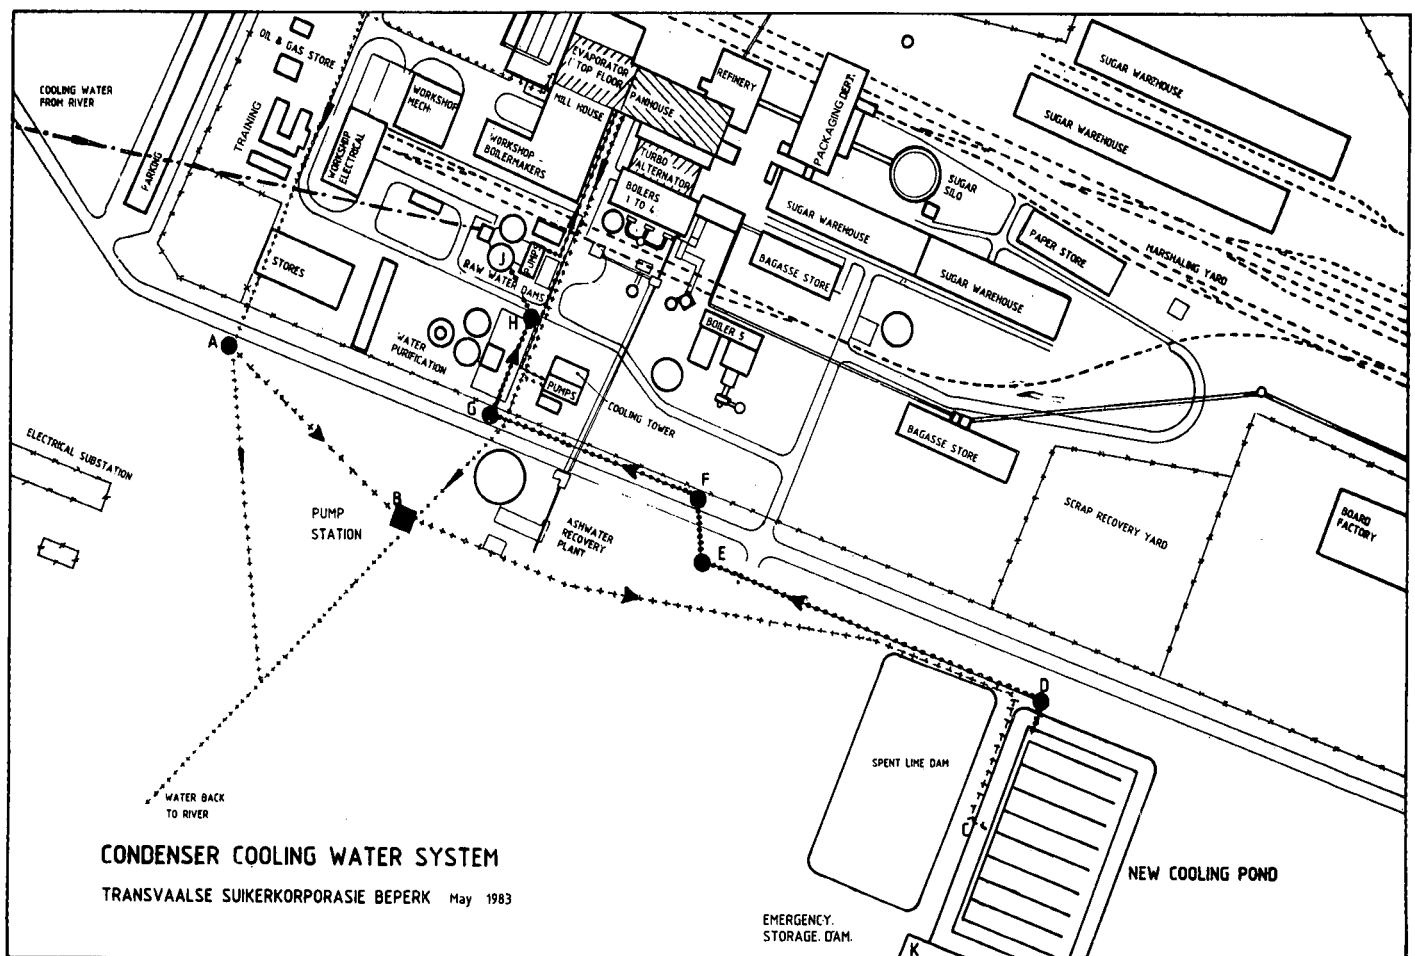


FIGURE 1 Condenser cooling water system, new cooling pond and piping



The depth of the dam was mainly determined by the particular terrain but 1,5 m of water was enough for a retention time of three hours. This could cater for any surges in temperature and volume flow.

Earth walls with the side sloped down to the bottom were packed with stones and covered with concrete which was broomed over. The bottom of the pool was covered with a 200 mm layer of red soil to help with the waterproofing.

Pipes were installed on treated gumpoles with the main header being 400 mm. There were nine distributing lines, from 250 mm down to 150 mm. Each distributing pipe had 22 × 50 mm laterals with sprays. Each spray was equipped with a removable 25 mm diameter nozzle. The number of sprays was calculated according to Hugot:<sup>2</sup>

$$q = 25cs\sqrt{2gh}$$

where  $c = \text{constant} = 0,45$   
 $s = \text{area of orifice}$   
in square inches  
 $h = \text{water head in feet}$   
 $q = \text{cu ft/h}$

With a head of 23,1 ft (7,04 m) and an orifice diameter of 1 inch (25,4 mm) the number of sprays was 216. Hugot<sup>3</sup> also gives formulae for the spacing of the individual nozzles.

The nozzle units used were fortunately a standard type from a well known manufacturer.

The pond was constructed such that when it was full it would be at the same level as the cooling water pump station feed dam (J) when it was also full. Water could thus flow in either direction in the gravity main (D E F G H J).

- Gravity main (D — J): this pipeline necessitated the use of 900 mm asbestos cement pipes with a total length of 560 m. Two underground road crossings had to be constructed together with four towers at turning points. There was usually a change of level at a turning point. Special bends could not be made in time and thus it was opted for open top towers.
- Emergency storage dam (K): during the design stage it was realized that some storage facility would have to be provided. A disused dam adjacent to the new spray pond was converted into a dam 120 m × 75 m × 5 m deep, giving an 11 hour full reserve.
- The capital cost for the project was approximately R300 000.

## Performance

Typical measured figures are given below:

	Design	Actual
water flow m <sup>3</sup> /h	2 079	2 079
water inlet temperature °C	49	52
water outlet temperature °C	33	33
Air temperature dry bulb °C	30	33
Air temperature wet bulb °C	26	25

Water losses were taken as being 5%.

Maintenance was not a problem but a number of nozzle blockages occurred as a result of foreign objects and screens on pumps were not very successful due to algae. Algae in the dams was not a serious problem but this was not the case in the feedsumps of the pumps where the water was still relatively hot.

Savings were made in electric power because water was not pumped from the river. The river pumps are 450 kW each whereas the spray pond pumps are only 85 kW. This amounted to a saving of R80 000 per year.

## Conclusion

The system was completed in time, on 15 May 1983 when the crushing season started. It was possible to start crushing and continue throughout the year without serious concern because of a lack of cooling water.

## REFERENCES

1. Hugot, E. (1960). Handbook of cane sugar engineering. Elsevier Publishing Company p 647.
2. *ibid* p 649.
3. *ibid* p 648.